


SpyGadgets.no

SALYUT - PC220

WIFI AUDIO BUG & VOICE RECORDER INTEGRATED IN POWER SOCKET

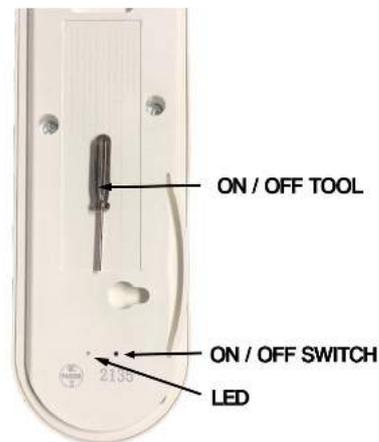

Look at a bottom side of power socket and use supplied tool for ON-OFF operation

POWER ON:

Press ON/OFF button for 2 seconds, red light turns ON, release button, red light goes OFF

POWER OFF:

Press ON/OFF button for 2 seconds, red light slow flashing, release button, red light goes OFF

PAIRING MODE:

When device is in ON mode, short press ON/OFF button, red light start fast flashing and continue till device is paired via mobile app

CHARGING:

Connect cable to 220V, backup battery will start charging automatically. Device can work connected to 220V without any limits. All 220V and USB sockets work normally

TECHNICAL SPECIFICATIONS:

Dimensions: 300x60x60 mm

Working time : unlimited when cable connected in 220V

Backup battery capacity: 500mAh (used only when cable is disconnected from 220V)

Backup battery duration: 7 hours live listening (Wifi ON, Recording ON)

24 hours in standby (Wifi standby, Recording standby)

7 days in sleep (Wify sleep, Recording standby)

Connectivity: 2,4Ghz wifi network (5G wifi network is not supported)

SD card: micro SD 32 Gb integrated, (capable to record 512 hours)

Recording : WaV format , 128kbps, Voice activation, memory consumption 1Mb/ minute , 512 hours /32Gb

Downloading over Wifi speed: 1min recording / 5 sec download

5 min recording / 25 sec download

10 min recording / 1 min download

MANUAL FOR INSTALATION AND USE CAMSC APP FOR SALYUT WIFI AUDIO LISTENING DEVICES



DOWNLOAD AND INSTALLATION:

Scan QR code with your mobile, choose Apple store or Google Play store link and download CamSC app on your mobile. Install it.




CREATING ACCOUNT AND ACTIVATION:

Select European countries if your are from Europe
Select REGISTRATION tab
Enter your email and choose password (8 characters min.)
Check service agreement box and press SEND CAPTCHA
Check your email to receive captcha code
Insert CAPTCHA CODE and tap REGISTRATION



ADDING DEVICE AND CONNECTING TO YOUR WIFI


Turn ON your SALYUT device and turn on PAIRING MODE on it
Connect your mobile to local wifi, enable bluetooth on it
On CamSC app tap on + , Audio Recorder, CAM-3BDXXX
Choose your local wifi name and password, NEXT Wait till
configuring ends, light on SALYUT device will be ON, when
configuration finnish, light goes OFF

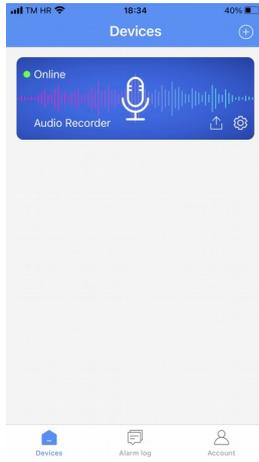


MAIN SCREEN:

On main screen you can perform these actions:
 Tap on microphone icon for live listening and recordings playback
 Setup icon for entering in setup
 Share icon to share acces to device
 + icon to add another device to same app
 Alarm log to see all voice activated alarms
 Account to see your account details

LIVE LISTENING SCREEN:

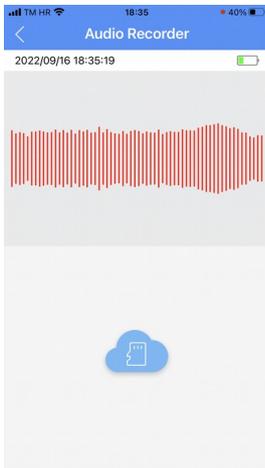

Here you can listen live audio from devices (headphones are recommended)
 Tap on SD card icon then choose SD card storage to acces your recordings on SD card
 On recording list, tap on right icon to download file, once file is downloaded you can play it

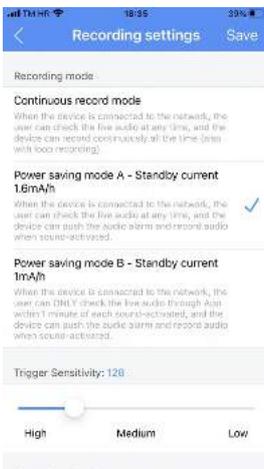

RECORDING SETTINGS PAGE:

Continuous record mode: In this mode device will allways be connected on WiFi network and will allways record. In this mode battery consumption is maximum

Power saving mode A : This is standby mode, when sound is present device recording, WiFi is on standby (not connected but ready to connect on your request for live listening), you can connect to device anytime for live listen or recording download. Battery consumption is moderate. This settings is RECOMENDED

Power saving mode B: This is deep sleep mode with lowest battery consumption, WiFi is OFF, live listening is not possible if there is no sound present. Voice activation works and device is Wifi accesible for live listen and setup changes only during recording interval. Be careful with this mode, especially if trigger sensitivity is on Low, possible that device will be allways OFF .